

**400 Series  
Industrial Ethernet Switches  
Installation  
Guide**

*Industrial Ethernet Switch Installation Guide*

**405TX**

**405FX-SC**

**405FX-ST**

**405FXE-SC-YY**

**405FXE-ST-YY**

Where: YY = -15, -40, or -80





Copyright, © N-TRON Corp., 2005  
820 S. University Blvd., Suite 4E  
Mobile, AL 36609 USA

All rights reserved. Reproduction, adaptation, or translation without prior written permission from N-TRON Corp. is prohibited, except as allowed under copyright laws.

Ethernet is a registered trademark of Xerox Corporation. All other product names, company names, logos or other designations mentioned herein are trademarks of their respective owners.

The information contained in this document is subject to change without notice. N-TRON Corp. makes no warranty of any kind with regard to this material, including, but not limited to, the implied warranties of merchantability or fitness for a particular purpose. In no event shall N-TRON Corp. be liable for any incidental, special, indirect, or consequential damages whatsoever included but not limited to lost profits arising out of errors or omissions in this manual or the information contained herein.

## Warning

Do not perform any services on the unit unless qualified to do so. Do not substitute unauthorized parts or make unauthorized modifications to the unit.

Do not operate the unit with the top cover removed, as this could create a shock or fire hazard.

Do not block the air vents on the sides or the top of the unit.

Do not operate the equipment in the presence of flammable gasses or fumes. Operating electrical equipment in such an environment constitutes a definite safety hazard.

# Safety Warnings

## ELECTRICAL SAFETY



**WARNING:** Do not disconnect while circuit is live, unless area is known to be non-hazardous.

**WARNING:** Disconnect the power cable before removing the enclosure top.

**WARNING:** Do not operate the unit with the top cover removed.

**WARNING:** Do not work on equipment or cables during periods of lightning activity.

**WARNING:** Do not perform any services on the unit unless qualified to do so.

**WARNING:** Do not block the air vents.

**WARNING:** Observe proper DC Voltage polarity when installing power input cables. Reversing voltage polarity can cause permanent damage to the unit and void the warranty.

**Power must be supplied by an isolating source, and a 0.5 A max rated UL recognized fuse must be installed immediately before the unit**

## LASER SAFETY (405FXE Only)



**WARNING:** CLASS 1 Laser Product. Do not stare into the Laser Beam.

## **405FX, 405FXE, & 405TX Industrial Ethernet Switches**

The 405TX and 405FX Unmanaged Industrial Ethernet Switches support high speed layer 2 switching between ports.

The 405TX is an affordable 5 port unmanaged switch that is capable of auto negotiating 10/100 Mb and half/full duplex communications. The N-TRON 405TX is housed in a ruggedized steel enclosure, and provides 5 Category 5 compliant 10/100-BaseT connections for high performance network design, and hub/repeater upgrades.

The 405FX is a 5 port unmanaged switch that has 4 ports identical to the 405TX, plus an additional multimode fiber optic up-link port, capable of 2 Kilometers of 100 Mb communications without the use of repeaters.

The 405FXE is a 5 port unmanaged switch that is similar to the 405FX, but with extended range. The N-TRON 405FXE utilizes a singlemode fiber transceiver that is capable of 15 Kilometers of 100 Mb communications.

Both the 405FX and 405FXE utilize the IEEE compliant SC or ST duplex connector for fiber optic communications. The 4 10/100Base-TX ports utilize the RJ45 shielded connector.

All N-TRON switches come housed in a steel ruggedized Din-Rail enclosure, designed to withstand the most demanding industrial applications, and have been fully tested and certified at industrial environmental extremes. All 405 Units operate on 10-30VDC @ 0.2A.

### **Key Features**

- Full IEEE 802.3 & 100BASE-FX Compliance
- Extended Environmental Specifications
- Support for Full/Half Duplex Operation
- LED Link/Activity Status Indication
- Auto Sensing Speed and Flow Control
- Up to 1.0 Gb/s Maximum Throughput
- Industry Standard DIN-Rail Enclosure

## PACKAGE CONTENTS

Please make sure the Ethernet Switch package contains the following items:

1. 405FX/405FXE/405TX Ethernet Switch
2. This Installation Guide

Contact your carrier if any items are damaged.

## INSTALLATION

Read the following warning before beginning the installation:

### WARNING



The 405FXE unit contains a Class 1 Laser. Do not stare into the laser beam (fiber optic connector) when installing or operating the product.



Never install or work on electrical equipment or cabling during periods of lightning activity.

Disconnect the power cable before removing the enclosure top.

Do not operate the unit with the top cover removed

### UNPACKING


Remove all the equipment from the packaging, and store the packaging in a safe place.

File any damage claims with the carrier.

### 405FX/405FXE HALF DUPLEX SETUP

While all RJ45 ports are Autosensing, the 405FX/405FXE Fiber Optic Port is factory configured for full duplex operation. In the event half duplex operation is desired, follow these steps:

1. Remove the Voltage Input Power Plugs.
2. Remove the top cover (8 screws).
3. Remove the jumper plug (JP1) from pins 1 and 2.
4. Replace the top cover.
5. Proceed with the installation.

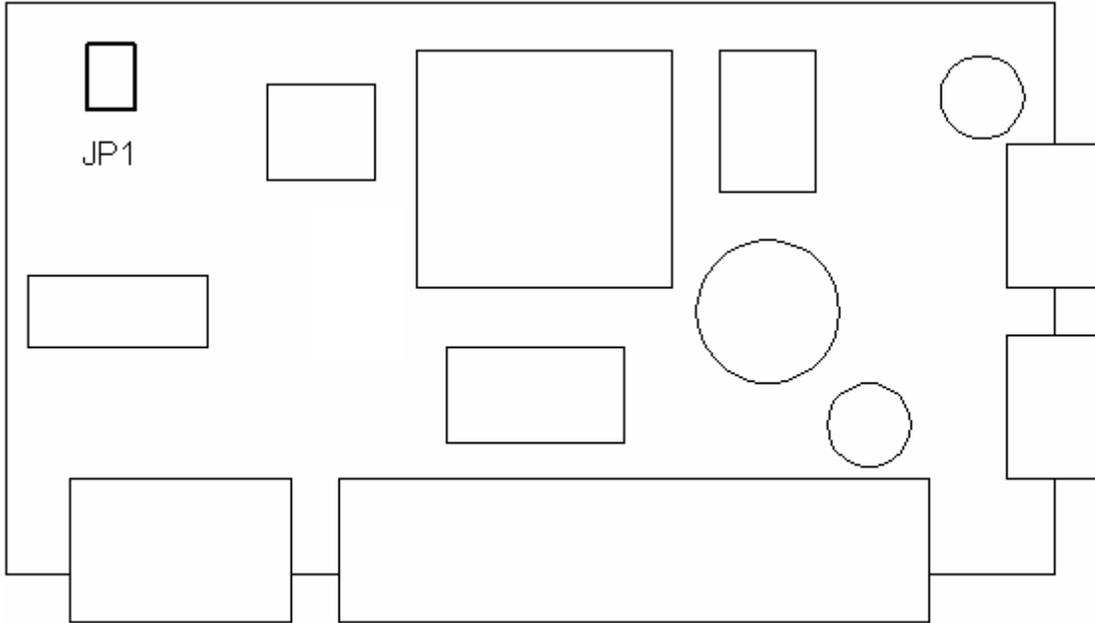

Full Duplex = Pins 1 and 2 shorted.

Half Duplex = Remove jumper.

## DIN-Rail Mounting

Install the unit in a standard DIN-Rail. Recess the unit to allow at least 5" of horizontal clearance for fiber optic cable bend radius (2" for TX models). Note: This unit may be mounted horizontally or vertically.


To install the unit to 35mm industrial DIN-Rail - Place the top edge of the included mounting bracket on the back of the unit against the top flange of the DIN-Rail at a 15° angle. Rotate the bottom of the unit to the back (away from you) until it snaps into place.

To remove the unit from the 35mm industrial DIN-Rail apply downward force to the unit until it disengages from the bottom of the unit from the DIN-Rail. Then, rotate the unit approximately 15° upward and towards you to completely remove the unit.


## Optional Mounting

With the exception of the 524TX and 526FX2, all N-Tron™ products are designed to be mounted on industry standard 35mm DIN-Rail. However, DIN-Rail mounting may not be suitable for all applications. We offer two alternative mounting solutions.

Our 900 Panel Mount Assembly (P/N: 900-PM) may be used to securely mount our 100, 200, 300, 400, 500, or 900 Series products to a panel or other flat surface.

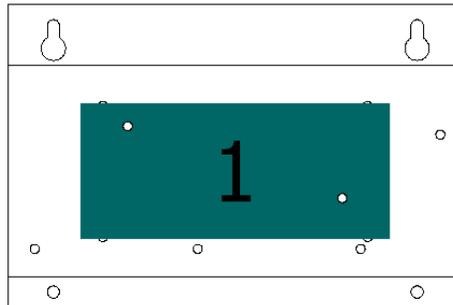

Our Rack Mount Assembly (P/N: 900-RM) may be used to mount our products to standard 19" racks.

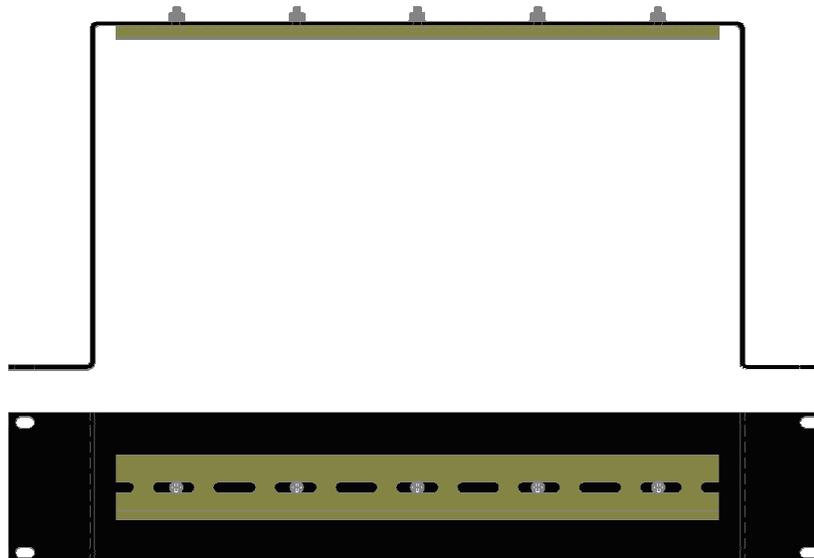

## FRONT PANEL



### From Left to Right:


<b>LNK</b>	Link LED for Fiber Optic Port (405FX/FXE only)
<b>TX</b>	Fiber Optic Transmit Port (405FX/FXE Only)
<b>RX</b>	Fiber Optic Receive Port (405FX/FXE Only)
<b>ACT</b>	Activity LED for Fiber Optic Port (405FX/FXE only)
<b>X</b>	RJ45 Crossover Uplink Port (405TX Only)
<b>RJ45 Ports</b>	Auto sensing 10/100BaseT Connections
<b>!</b>	Red LED indicates controller error
<b>⏻</b>	Green LED lights when Power is connected

**NOTE:** Each RJ45 data port has two LED's located at the top of each connector. The left LED indicates LINK status, and the right LED indicates ACTIVITY.

**LED's:** The table below describes the operating modes:

LED	Color	Description
⏻	GREEN	Power is Applied
	OFF	Power is OFF
!	RED	Controller HW Error
	OFF	No Errors. Normal Operation.
LNK	GREEN	Link between ports established
	OFF	No Link between ports
ACT	GREEN	Data is active between ports
	OFF	Data is inactive between ports

### APPLYING POWER (Side View)

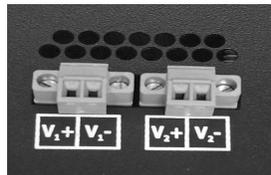

Unscrew & Remove the DC Voltage Input Plug(s) from the side header

Install the DC Power Cables into the Plug(s) (observing polarity).

Plug the Voltage Input Plug(s) back into the side header.

Tightening torque for the terminal block power plug is **0.22 Nm/0.162 Pound Foot**.

All LED's will flash ON Momentarily (including the Error LED)

Verify the Power LED stays ON (GREEN).

Verify the Error LED is OFF (after a few seconds).


**Note:** Only 1 plug is required to be connected to power input for minimal operation. For redundant power operation, V<sub>1</sub> and V<sub>2</sub> plugs must be connected to separate DC Voltage sources. Use wire sizes 16-28 gauge.

Recommended 24V DC Power Supplies, similar to 100VAC/240VAC:

N-Tron's NTPS-24-1.3, DC 24V/1.3A

## N-TRON SWITCH GROUNDING TECHNIQUES


The grounding philosophy of any control system is an integral part of the design. N-Tron switches are designed to be grounded, but the user has been given the flexibility to float the switch when required. The best noise immunity and emissions (i.e. CE) are obtained when the N-Tron switch chassis is connected to earth ground via a drain wire. Some N-Tron switches have metal din-rail brackets that can ground the switch if the din-rail is grounded. In some cases, N-Tron switches with metal brackets can be supplied with optional plastic brackets if isolation is required.

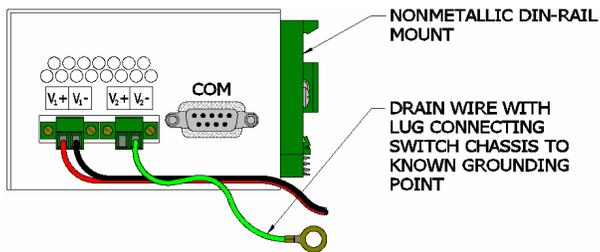

Both V- legs of the power input connector are connected to chassis internally on the PCB. Connecting a drain wire to earth ground from one of the V- terminal plugs as shown here will ground the switch and the chassis. The power leads from the power source should be limited to 3 meters or less in length.

As an alternate, users can run a drain wire & lug from any of the Din-Rail screws or empty PEM nuts on the enclosure. When using an unused PEM nut to connect a ground lug via a machine screw, care should be taken to limit the penetration of the outer skin by less than 1/4 in. Failure to do so may cause irreversible damage to the internal components of the switch.

Note: Before applying power to the grounded switch, you must use a volt meter to verify there is no voltage difference between the power supply's negative output terminal and the switch chassis grounding point.

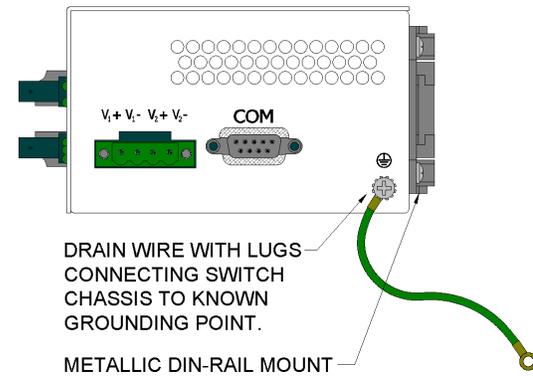


The use of shielded cables between devices is not required for most N-Tron devices (please consult the user manuals for specific details). If the use of shielded cables is required, it is generally recommended to only connect the shield at one end to prevent ground loops and interfere with low level signals (i.e. thermocouples, RTD, etc.). Cat5e cables manufactured to EIA-568A or 568B specifications are required for use with N-Tron Switches.



In the event all Cat5e patch cable distances are small (i.e. All Ethernet devices are located the same local cabinet and/or referenced to the same earth ground), it is permissible to use fully shielded cables terminated to chassis ground at both ends in systems void of low level analog signals.

## RJ45 CONNECTOR CRIMP SPECIFICATIONS

Please reference the illustration below for your Cat5 cable specifications:

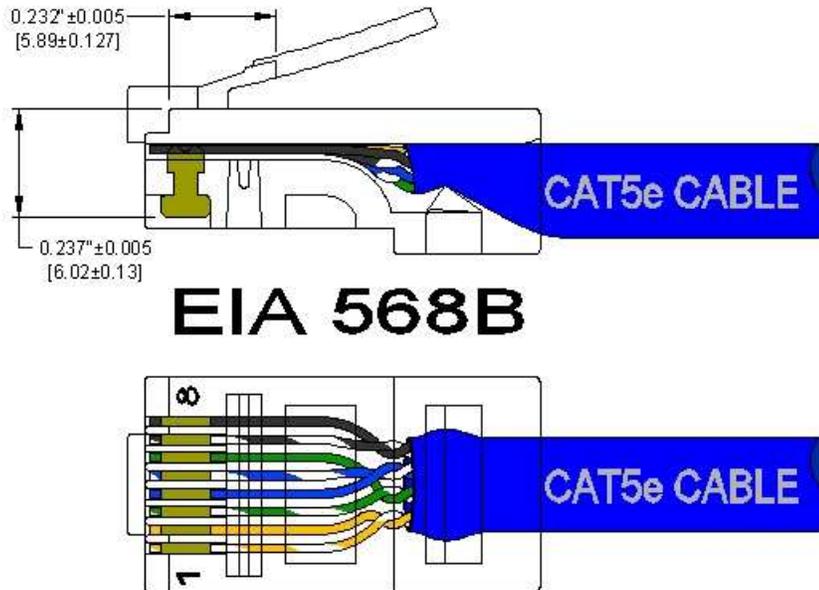

## CONNECTING THE UNIT

For 405FX & 405FXE units, remove the dust cap from the fiber optic connectors and connect the fiber optic cables. The TX port on the 405FX should be connected to the RX port of the far end station. The RX port on the 405FX should be connected to the TX port of the far end station.

For 10/100 Base-TX ports, plug a Category 5 twisted pair cable into the RJ45 connector. Connect the other end to the far end station. Verify that the LNK LED's are ON once the connection has been completed. For Switch to Switch or Switch to Repeater connections, use the X-port and a standard Category 5 cable. To connect any other port (other than the X-Port) to another Switch or Repeater, use a standard Category 5 crossover cable.

## TROUBLESHOOTING

1. Make sure the  (Power LED) is ON.
2. Make sure the  (Error LED) remains OFF 3 seconds after initial power up.
3. Verify that Link LED's are ON for connected ports.
4. Verify straight through cabling used between stations.
5. Verify crossover cabling used between switches or repeaters (non X-Port only).
6. Verify that cabling is Category 5 for 100Mbit Operation.
7. Verify TX is connected to far end RX and vice versa (405FX/FXE only).

## SUPPORT

Contact N-TRON Corp. at:  
TEL: 251-342-2164  
FAX: 251-342-6353  
www.n-tron.com  
support@n-tron.com

## FCC STATEMENT

This product complies with Part 15 of the FCC-A Rules.

Operation is subject to the following conditions:

- (1) This device may not cause harmful Interference
- (2) This device must accept any interference received, including interference that may cause undesired operation.



## KEY SPECIFICATIONS

### Physical

*Height:* 2.13" (5.41 cm)  
*Width:* 5.00" (12.70 cm)  
*Depth:* 3.00" (7.62 cm)  
*Weight:* ~ 1.2 lbs. (0.6 kg)  
(Note: can be mounted horizontally or vertically)

### Electrical

*Input Voltage:* 10-30 VDC (Regulated)  
*Input Current:* 220mA max. @ 24VDC (Steady State)  
*Inrush Current:* 14.0Amp/0.9ms max. @ 24VDC  
*Input Ripple:* Less than 100 mV  
*Input Wire Size:* 16-28 AWG

### Environmental

*Operating Temperature:* -20°C to 70°C  
*Storage Temperature:* -40°C to 85°C  
*Operating Humidity:* 10% to 90% (Non Condensing)  
*Operating Altitude:* 0 to 10,000 ft.

### Network Media

*10BaseT:* > Cat-3 Cable  
*100BaseT:* > Cat-5 Cable  
*100BaseFX:* Multimode: 50-62.5/125µm Fiber  
Singlemode: 7-10/125µm Fiber

### Fiber Transceiver Characteristics

Fiber Length:	2km*	15km**	40km**	80km**
TX Power Min/Max	-19dBm/-14dBm	-15dBm/-7dBm	-5dBm/0dBm	-5dBm/0dBm
RX Sensitivity Max:	-32dBm	-34dBm	-34dBm	-34dBm
Wavelength:	1310nm	1310nm	1310nm	1550nm

\*=Multimode \*\* =Singlemode

### Connectors

*10/100BaseT:* 5 (five) RJ45 UTP Ports (405TX)  
4 (four) RJ45 UTP Ports (405FX/FXE)  
*100BaseFX:* SC or ST Duplex Port (405FX/FXE)

### Recommended Minimum Wiring Clearance:

*Front:* 2" (5.08 cm) (405TX)  
5" (12.7 cm) (405FX/FXE)  
*Side:* 1" (2.54 cm)

**Regulatory Approvals:**

**Safety:** UL 1604 (US and Canada) Hazardous Locations, Class I, Zone 2, Group IIC, T4A

**EMI:** EN55022 – Class A  
FCC Part 15 Class A

**EMS:** EN55024:1998  
EN61000-4-2:1995  
EN61000-4-3:1997  
EN61000-4-4:1995  
EN61000-4-5:1995  
EN61000-4-6:1996

**GOST-R Certified.**

**Warranty:** 1 year from the date of purchase

## **N-TRON Limited Warranty**

N-TRON, Corp. warrants to the end user that this hardware product will be free from defects in workmanship and materials, under normal use and service, for the applicable warranty period from the date of purchase from N-TRON or its authorized reseller. If a product does not operate as warranted during the applicable warranty period, N-TRON shall, at its option and expense, repair the defective product or part, deliver to customer an equivalent product or part to replace the defective item, or refund to customer the purchase price paid for the defective product. All products that are replaced will become the property of N-TRON. Replacement products may be new or reconditioned. Any replaced or repaired product or part has a ninety (90) day warranty or the remainder of the initial warranty period, whichever is longer. N-TRON shall not be responsible for any custom software or firmware, configuration information, or memory data of customer contained in, stored on, or integrated with any products returned to N-TRON pursuant to any warranty.

**OBTAINING WARRANTY SERVICE:** Customer must contact N-TRON within the applicable warranty period to obtain warranty service authorization. Dated proof of purchase from N-TRON or its authorized reseller may be required. Products returned to N-TRON must be pre-authorized by N-TRON with a Return Material Authorization (RMA) number marked on the outside of the package, and sent prepaid and packaged appropriately for safe shipment. Responsibility for loss or damage does not transfer to N-TRON until the returned item is received by N-TRON. The repaired or replaced item will be shipped to the customer, at N-TRON's expense, not later than thirty (30) days after N-TRON receives the product. N-TRON shall not be responsible for any software, firmware, information, or memory data of customer contained in, stored on, or integrated with any products returned to N-TRON for repair, whether under warranty or not.

**ADVANCE REPLACEMENT OPTION:** Upon registration, this product qualifies for advance replacement. A replacement product will be shipped within three (3) days after verification by N-TRON that the product is considered defective. The shipment of advance replacement products is subject to local legal requirements and may not be available in all locations. When an advance replacement is provided and customer fails to return the original product to N-TRON within fifteen (15) days after shipment of the replacement, N-TRON will charge customer for the replacement product, at list price.

**WARRANTIES EXCLUSIVE: IF AN N-TRON PRODUCT DOES NOT OPERATE AS WARRANTED ABOVE, CUSTOMER'S SOLE REMEDY FOR BREACH OF THAT WARRANTY SHALL BE REPAIR, REPLACEMENT, OR REFUND OF THE PURCHASE PRICE PAID, AT N-TRON'S OPTION. TO THE FULL EXTENT ALLOWED BY LAW, THE FOREGOING WARRANTIES AND REMEDIES ARE EXCLUSIVE AND ARE IN LIEU OF ALL OTHER WARRANTIES, TERMS, OR CONDITIONS, EXPRESS OR IMPLIED, EITHER IN FACT OR BY OPERATION OF LAW, STATUTORY OR OTHERWISE, INCLUDING WARRANTIES, TERMS, OR CONDITIONS OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, SATISFACTORY QUALITY, CORRESPONDENCE WITH DESCRIPTION, AND NON-INFRINGEMENT, ALL OF WHICH ARE EXPRESSLY DISCLAIMED. N-TRON NEITHER ASSUMES NOR AUTHORIZES ANY OTHER PERSON TO ASSUME FOR IT ANY OTHER LIABILITY IN CONNECTION WITH THE SALE, INSTALLATION, MAINTENANCE OR USE OF ITS PRODUCTS. N-TRON SHALL NOT BE LIABLE UNDER THIS WARRANTY IF ITS TESTING AND EXAMINATION DISCLOSE THAT THE ALLEGED DEFECT OR MALFUNCTION IN THE PRODUCT DOES NOT EXIST OR WAS CAUSED BY CUSTOMER'S OR ANY THIRD PERSON'S MISUSE, NEGLIGENCE, IMPROPER INSTALLATION OR TESTING, UNAUTHORIZED ATTEMPTS TO OPEN, REPAIR OR MODIFY THE PRODUCT, OR ANY OTHER CAUSE BEYOND THE RANGE OF THE INTENDED USE, OR BY ACCIDENT, FIRE, LIGHTNING, POWER CUTS OR OUTAGES, OTHER HAZARDS, OR ACTS OF GOD.**

**LIMITATION OF LIABILITY: TO THE FULL EXTENT ALLOWED BY LAW, N-TRON ALSO EXCLUDES FOR ITSELF AND ITS SUPPLIERS ANY LIABILITY, WHETHER BASED IN CONTRACT OR TORT (INCLUDING NEGLIGENCE), FOR INCIDENTAL, CONSEQUENTIAL, INDIRECT, SPECIAL, OR PUNITIVE DAMAGES OF ANY KIND, OR FOR LOSS OF REVENUE OR PROFITS, LOSS OF BUSINESS, LOSS OF INFORMATION OR DATA, OR OTHER FINANCIAL LOSS ARISING OUT OF OR IN CONNECTION WITH THE SALE, INSTALLATION, MAINTENANCE, USE, PERFORMANCE, FAILURE, OR INTERRUPTION OF ITS PRODUCTS, EVEN IF N-TRON OR ITS AUTHORIZED RESELLER HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES, AND LIMITS ITS LIABILITY TO REPAIR, REPLACEMENT, OR REFUND OF THE PURCHASE PRICE PAID, AT N-TRON'S OPTION. THIS DISCLAIMER OF LIABILITY FOR DAMAGES WILL NOT BE AFFECTED IF ANY REMEDY PROVIDED HEREIN SHALL FAIL OF ITS ESSENTIAL PURPOSE.**

**DISCLAIMER:** Some countries, states, or provinces do not allow the exclusion or limitation of implied warranties or the limitation of incidental or consequential damages for certain products supplied to consumers, or the limitation of liability for personal injury, so the above limitations and exclusions may be limited in their application to you. When the implied warranties are not allowed to be excluded in their entirety, they will be limited to the duration of the applicable written warranty. This warranty gives you specific legal rights which may vary depending on local law.

**GOVERNING LAW:** This Limited Warranty shall be governed by the laws of the State of Alabama, U.S.A.